


BRONZE STUD CONNECTORS

TYPE SAX

Stud to Cable
Two-way

Castings: Electrical Bronze
Hardware: Silicon Bronze
Options: See Page 154

All-bronze stud connector for copper stud to cable, end-on or 90°. On Sizes marked (*), cap is four-way reversible design. On other sizes, full conductor range is accommodated by rotating cap 90°.

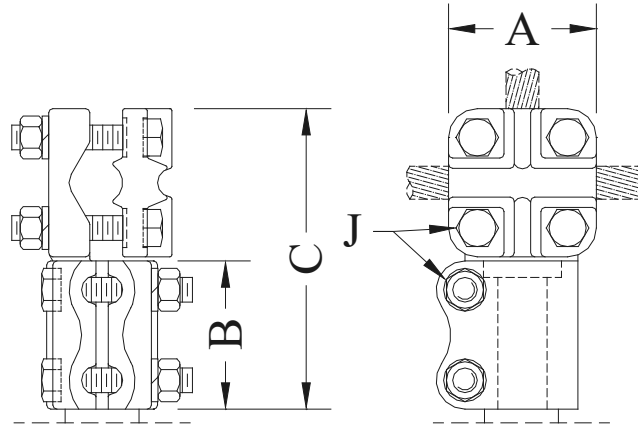

CATALOG NUMBER	STUD DIA./THD.	CONDUCTOR RANGE	DIMENSIONS - INCHES				WEIGHT (POUNDS)
			A	B	C	J	
SAX-8250	3/4 - 16	#8 SOL. - 4/0 STR.	1-7/8	2	4	3/8	2.45
* SAX-8256		#6 SOL. - 500 MCM	2-1/4	2	4-3/8	3/8	3.20
SAX-8450	1 - 14	#8 SOL. - 4/0 STR.	1-7/8	2	4	3/8	2.50
* SAX-8456		#6 SOL. - 500 MCM	2-1/4	2	4-5/16	3/8	3.20
SAX-8462		4/0 STR. - 800 MCM	3	2-1/4	5-3/8	1/2	4.00
* SAX-8466		#2 STR.-1000 MCM	3	2-1/8	5-7/16	1/2	5.30
SAX-8550	1-1/8 - 12	#8 SOL. - 4/0 STR.	1-7/8	2-1/4	4-1/4	3/8	2.70
* SAX-8556		#6 SOL. - 500 MCM	2-1/4	2-1/4	4-5/8	3/8	3.45
SAX-8562		4/0 STR. - 800 MCM	3	2-1/4	5-1/2	1/2	5.25
* SAX-8566		#2 STR. - 1000 MCM	3	2-1/2	5-5/8	1/2	4.80
SAX-8650	1-1/4 - 12	#8 SOL. - 4/0 STR.	1-7/8	2	4-1/2	3/8	2.50
* SAX-8656		#6 SOL. - 500 MCM	2-1/4	2-1/4	4-5/8	3/8	4.20
SAX-8662		4/0 STR. - 800 MCM	3	2-3/4	5-7/8	1/2	7.00
* SAX-8666		#2 STR. - 1000 MCM	3	2-1/2	5-5/8	1/2	4.85
SAX-8750	1-1/2 - 12	#8 SOL. - 4/0 STR.	1-7/8	2-1/4	4-3/4	3/8	3.55
* SAX-8756		#6 SOL. - 500 MCM	2-1/4	2-1/4	5-1/8	3/8	4.35
SAX-8762		4/0 STR. - 800 MCM	3	2-1/4	5-3/8	1/2	5.30
* SAX-8766		#2 STR. - 1000 MCM	3	2-1/2	5-5/8	1/2	5.20
* SAX-8778		#2 SOL. - 2000 MCM	3-3/8	2-1/4	6-1/8	1/2	7.95
*SAX-8856	1-3/4 - 12	#6 SOL. - 500 MCM	2-1/4	2-1/2	5-3/16	3/8	4.75
SAX-8862		4/0 STR. - 800 MCM	3	2-3/4	5-7/8	1/2	6.00
SAX-8950	2 - 12	#8 SOL. - 4/0 STR.	1-7/8	2-1/2	4-1/2	3/8	5.50
* SAX-8956		#6 SOL. - 500 MCM	2-1/4	2-1/2	5-3/8	3/8	4.75
SAX-8962		4/0 STR. - 800 MCM	3	2-3/4	6-1/8	1/2	9.20
* SAX-8966		#2 STR. - 1000 MCM	3	2-3/4	6-1/8	1/2	5.85
* SAX-9156	2-1/2 - 12	#6 SOL. - 500 MCM	2-1/4	2-1/2	5-1/8	3/8	8.00
SAX-9162		4/0 STR. - 800 MCM	3	2-3/4	6	1/2	9.00
* SAX-9166		#2 STR. - 1000 MCM	3	2-3/4	6	1/2	16.75

SEFCOR