


# BRONZE STUD CONNECTORS

## TYPE SAX2

Stud to Two Cable  
Two-way

Castings: Electrical Bronze  
Hardware: Silicon Bronze  
Options: See Page 154

All-bronze stud connector for copper stud to two cable, end-on or 90°. On sizes marked (\*), cap is four-way reversible design. On other sizes, full conductor range is accommodated by rotating cap 90°.

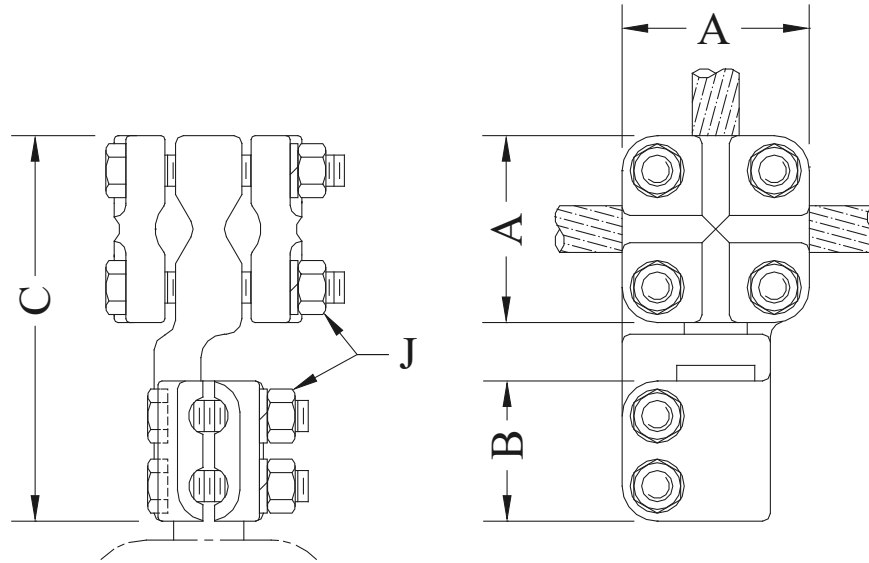

CATALOG NUMBER	STUD DIA./THD.	CONDUCTOR RANGE	DIMENSIONS - INCHES				WEIGHT (POUNDS)
			A	B	C	J	
SAX2-8250	3/4 - 16	#8 SOL. - 4/0 STR.	1-7/8	2	4-1/8	3/8	2.75
SAX2-8450	1 - 14	#8 SOL. - 4/0 STR.	1-7/8	2	4-1/8	3/8	3.25
* SAX2-8456		#6 SOL. - 500 MCM	3	2-1/4	6-1/4	1/2	8.00
SAX2-8550	1-1/8 - 12	#8 SOL. - 4/0 STR.	1-7/8	2-1/4	4-3/8	3/8	3.25
* SAX2-8556		#6 SOL. - 500 MCM	3	2-1/4	6-1/4	1/2	8.00
SAX2-8562		4/0 STR. - 800 MCM	3	2-1/4	5-5/8	1/2	6.50
SAX2-8650	1-1/4 - 12	#8 SOL. - 4/0 STR.	1-7/8	2-1/4	4-3/8	3/8	3.50
* SAX2-8656		#6 SOL. - 500 MCM	3	2-1/4	6-1/4	1/2	7.00
SAX2-8662		4/0 STR. - 800 MCM	3	2-1/4	5-7/8	1/2	7.00
* SAX2-8756	1-1/2 - 12	#6 SOL. - 500 MCM	3	2-1/4	6-1/2	1/2	9.00
SAX2-8762		4/0 STR. - 800 MCM	3	2-1/4	5-5/8	1/2	7.00
* SAX2-8766		#2 STR. - 1000 MCM	2-7/8	2-1/4	5-7/8	1/2	8.90
* SAX2-8956	2 - 12	#6 SOL. - 500 MCM	3	2-1/2	6-9/16	1/2	11.05
SAX2-8962		4/0 STR. - 800 MCM	3	2-3/4	6-1/8	1/2	8.70
* SAX2-8966		#2 STR. - 1000 MCM	3	2-1/2	6-1/8	1/2	11.05
SAX2-9162	2-1/2 - 12	4/0 STR. - 800 MCM	3	2-3/4	6-1/8	1/2	9.00
* SAX2-9166		#2 STR. - 1000 MCM	3	2-3/4	6-1/8	1/2	9.00
* SAX2-9266	3 - 12	#2 STR. - 1000 MCM	3	3-1/8	6-1/8	1/2	12.50