

ALUMINUM STUD CONNECTORS

TYPE ASXTR Continued

CATALOG NUMBER	STUD DIA./THD.	PIPE SIZE (NPS)	DIMENSIONS - INCHES							WEIGHT (POUNDS)
			A	B	C	D	E	J1	J2	
ASXTR-5053-A ()	1-3/4 - 12	1-1/2	2-3/8	4-1/2	5	4-3/4	6-1/2	1/2	1/2	13.20
ASXTR-5058-A ()		2	2-3/8	4-3/4	5	5-1/8	6-3/4	1/2	1/2	15.90
ASXTR-5060-A ()		2-1/2	2-3/8	4-3/4	5	5-3/8	9	1/2	1/2	23.05
ASXTR-5458-A ()	2 - 12	2	2-3/8	4-3/4	5	5-1/8	6-3/4	1/2	1/2	14.00
ASXTR-5460-A ()		2-1/2	2-3/8	4-3/4	5	5-3/8	9	1/2	1/2	21.70
ASXTR-5462-A ()		3	2-3/8	5-3/8	5	5-1/2	9-1/2	5/8	1/2	22.70
ASXTR-5463-A ()		3-1/2	2-3/8	5-5/8	5	5-1/2	10	5/8	1/2	27.10
ASXTR-5958-A ()	2-1/2 - 12	2	2-5/8	4-3/4	5-1/4	5-1/8	6-3/4	1/2	1/2	25.20
ASXTR-5960-A ()		2-1/2	2-5/8	5-3/4	5-1/4	5-3/8	9	1/2	1/2	25.80
ASXTR-5962-A ()		3	2-5/8	5-3/8	5-1/4	5-1/2	9-1/2	5/8	1/2	26.40
ASXTR-5963-A ()		3-1/2	2-5/8	5-5/8	5-1/4	5-1/2	10	5/8	1/2	27.40
ASXTR-6160-A ()	3 - 12	2-1/2	3-1/8	4-3/4	6-1/8	5-3/8	9	1/2	5/8	22.25
ASXTR-6162-A ()		3	3-1/8	5-3/8	6-1/8	5-1/2	9-1/2	5/8	5/8	30.65
ASXTR-6163-A ()		3-1/2	3-1/8	5-5/8	6-1/8	5-1/2	10	5/8	5/8	35.00
ASXTR-6262-A ()	3-1/2 - 12	3	3-1/8	5-3/8	6-1/4	5-1/2	9-1/2	5/8	5/8	36.80
ASXTR-6263-A ()		3-1/2	3-1/8	5-5/8	6-1/4	5-1/2	10	5/8	5/8	38.80
ASXTR-6264-A ()		4	3-1/8	5-3/4	6-1/4	5-1/2	10	5/8	5/8	40.70
ASXTR-6362-A ()	4 - 12	3	3-1/4	5-3/8	6-3/8	5-1/2	9-1/2	5/8	5/8	38.90
ASXTR-6363-A ()		3-1/2	3-1/4	5-5/8	6-3/8	5-1/2	10	5/8	5/8	40.60
ASXTR-6364-A ()		4	3-1/4	5-3/4	6-3/8	5-1/2	10	5/8	5/8	42.50

TYPE WSXTR


For welded connection to aluminum pipe instead of bolted, substitute WSXTR in the table above. Refer to factory for dimensions and weights.

TYPE ASFFT

Expansion Semi-Flexible
Stud to Pipe

Pipe Clamp: 356-T6 Aluminum
Pipe Hardware: Aluminum Alloy
Strap Hardware: Stainless Steel
Strap: Copper
Options: See page 174

A semi-flexible stud connector for threaded copper stud to aluminum pipe. Laminated copper strap allows some angular misalignment between pipe and stud. Copper strap is soldered to form a solid tinned pad at each end.
*Bronze contact nut SHN is available. Refer to page 171 for details.

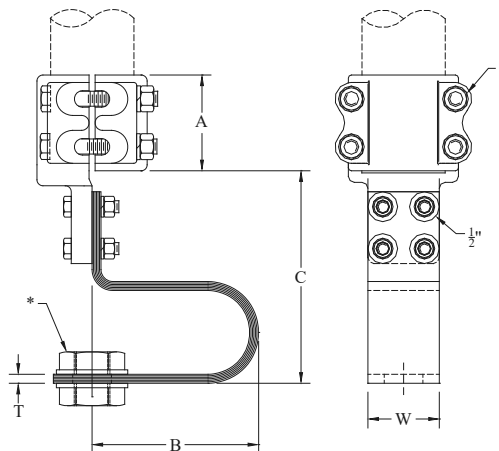


ALUMINUM STUD CONNECTORS

TYPE ASFFT Continued

CATALOG NUMBER	STUD DIA./THD.	PIPE SIZE (NPS)	DIMENSIONS - INCHES						WEIGHT (POUNDS)
			A	B	C	T	J	W	
ASFFT-1830	3/4 - 16	3/4	2-3/8	5-1/2	8	3/16	1/2	2	4.10
ASFFT-1839		1	3	5-1/2	8	1/4	1/2	2	4.30
ASFFT-1849		1-1/4	3	6	8	1/4	1/2	2	4.50
ASFFT-2730	1 - 14	3/4	2-3/8	5-1/2	8	3/16	1/2	2	4.40
ASFFT-2739		1	3	5-1/2	8	1/4	1/2	2	4.60
ASFFT-2749		1-1/4	3	6	8-1/4	3/8	1/2	2	4.80
ASFFT-2753		1-1/2	3-1/8	6-1/8	8-1/4	7/16	1/2	2	5.10
ASFFT-3330	1-1/8 - 12	3/4	4	6-11/16	8-5/16	3/16	1/2	3	5.85
ASFFT-3339		1	3	6-1/2	8	3/16	1/2	3	5.55
ASFFT-3349		1-1/4	3	4-7/8	8-3/4	1/4	1/2	3	6.55
ASFFT-3353		1-1/2	3	6-3/8	8-3/4	9/32	1/2	3	7.45
ASFFT-3358		2	3-1/2	6-3/8	8-3/4	9/32	1/2	3	10.20
ASFFT-3639	1-1/4 - 12	1	3	5-3/4	8	3/16	1/2	3	6.30
ASFFT-3649		1-1/4	3	6-3/8	8-3/4	9/32	1/2	3	6.60
ASFFT-3653		1-1/2	3	6-3/8	8-3/4	9/32	1/2	3	7.10
ASFFT-3658		2	3-1/2	6-3/8	8-3/4	3/8	1/2	3	11.15
ASFFT-3660		2-1/2	3-1/2	7	8-3/4	3/8	1/2	3	11.85
ASFFT-4449	1-1/2 - 12	1-1/4	3	4-7/8	8-3/4	1/4	1/2	3	9.65
ASFFT-4453		1-1/2	3	6-3/8	8-3/4	9/32	1/2	3	7.10
ASFFT-4458		2	3-1/2	7	8-7/8	3/8	1/2	3	11.70
ASFFT-4460		2-1/2	3-1/2	7	8-3/4	3/8	1/2	3	11.80
ASFFT-5453	2 - 12	1-1/2	3-1/8	7	9-7/8	3/8	1/2	4	15.00
ASFFT-5458		2	3-1/2	6-7/8	9-1/2	3/8	1/2	4	14.70
ASFFT-5460		2-1/2	3-1/2	7-3/8	9-1/2	1/2	1/2	4	18.20
ASFFT-5462		3	4	7-7/16	10-3/4	5/8	5/8	4	24.20

TYPE ASFFT90 - A 90° semi-flexible stud connector for threaded copper stud to aluminum pipe. This connector is the same as type ASFFT above except for 90° take-off. To specify, substitute ASFFT90 in the table above.

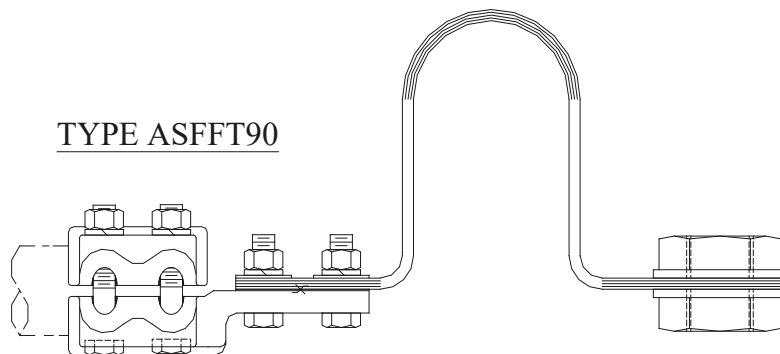

TYPE WSFFT - For welded connection to aluminum pipe instead of bolted, substitute the WSFFT or WSFFT90 in the table above. Refer to factory for dimensions and weights.