


# BRONZE TERMINALS

## TYPE FNCT

Straight Bolted  
Cable to Flat

Castings: Electrical Bronze  
Hardware: Silicon Bronze  
Options: See Page 193

Bronze alloy terminal with hex head clamping bolts for connecting copper cable to flat. Clamping bolts have hex-stops for one-wrench installation. Flat pads have NEMA drilling. All sizes are furnished with reversible cable caps.

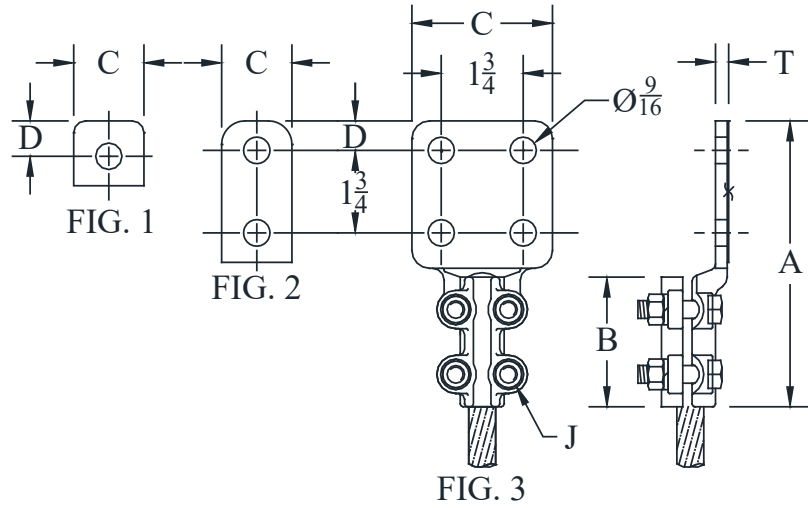

CATALOG NUMBER	FIG NO.	CONDUCTOR RANGE	DIMENSIONS - INCHES						WEIGHT (POUNDS)
			A	B	C	D	J	T	
FNCT-12-1A	1	#6 STR - 250 MCM	4-3/8	2-3/4	1-1/2	3/4	3/8	1/4	1.45
FNCT-12-2A	2		6	2-3/4	1-1/2	5/8	3/8	1/4	1.45
FNCT-12-2B	2		6-1/16	2-3/4	2	5/8	3/8	1/4	1.55
FNCT-12H-2B	2		6-3/8	2-3/4	2	5/8	1/2	1/4	2.45
FNCT-12-4A	3		6-1/16	2-3/4	3	5/8	3/8	1/4	1.95
FNCT-12H-4A	3		6-3/8	2-3/4	3	5/8	1/2	1/4	2.60
FNCT-20-1A	1	1/0 SOL - 500 MCM	5-1/2	3-7/16	1-1/2	3/4	3/8	3/8	2.90
FNCT-20-2B	2		7-1/8	3-7/16	2	5/8	3/8	3/8	2.90
FNCT-20H-2B	2		6-3/16	2-3/4	2	5/8	1/2	5/16	2.90
FNCT-20-4A	3		7-5/16	3-3/8	3	5/8	3/8	7/16	3.15
FNCT-20H-4A	3		6-1/4	2-3/4	3	5/8	1/2	5/16	3.15
FNCT-20-4B	3		8	3-1/2	4	1-1/8	3/8	5/16	3.40
FNCT-20H-4B	3	8-1/4	4-1/16	4	1-1/8	1/2	7/16	4.45	
FNCT-34-2B	2	4/0 SOL - 1000 MCM	7-1/16	3-1/2	2	5/8	1/2	1/2	4.15
FNCT-34-4A	3		7-1/16	3-1/2	3	5/8	1/2	7/16	4.30
FNCT-34-4B	3		8-1/16	3-1/2	4	1-1/8	1/2	11/32	5.60
FNCT-42-4A	3	500 - 1500 MCM	7-15/16	4-1/2	3	5/8	1/2	5/8	8.05
FNCT-42-4B	3		8-7/8	4-5/8	4	1-1/8	1/2	9/16	8.55
FNCT-48-2B	2	1000 - 2000 MCM	8-3/4	5	2	5/8	1/2	3/4	11.00
FNCT-48-4A	3		9-1/4	5	3	5/8	1/2	3/4	11.60
FNCT-48-4B	3		9-3/4	5	4	1-1/8	1/2	3/4	11.00