

# BRONZE MISCELLANEOUS


## TYPE ASPC-BR

Parallel Spacer  
Cable to Cable

Bronze parallel cable spacer for maintaining copper cable clearance.  
Contact factory for further information.  
L = Center Line Cable Spacing  
Example: ASPC-20-4-BR

Castings: Electrical Bronze  
Hardware: Silicon Bronze

CATALOG NUMBER	CONDUCTOR RANGE
ASPC-20-(L)-BR	350 - 500 MCM
ASPC-24-(L)-BR	650 - 750 MCM
ASPC-27-(L)-BR	750 MCM
ASPC-34-(L)-BR	950 - 1000 MCM
ASPC-35-(L)-BR	800 - 1000 MCM
ASPC-41-(L)-BR	1250 - 1500 MCM

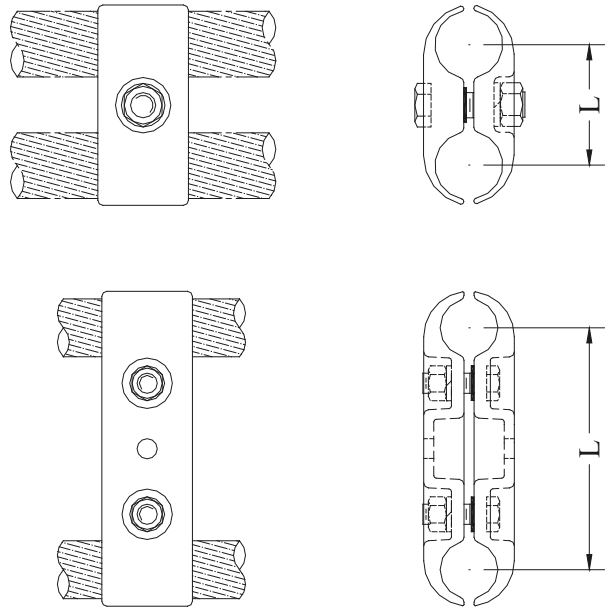

## TYPE CSPC

Parallel Spacer  
Cable to Cable

Bronze parallel cable spacer for maintaining copper cable clearance.  
Contact factory for further information.  
L = Center Line Cable Spacing  
Example: CSPC-20-4

Castings: Electrical Bronze  
Hardware: Silicon Bronze

CATALOG NUMBER	CONDUCTOR RANGE	DIMENSIONS (INCHES)	WEIGHT (POUNDS)
		L	
CSPC-20-4	300 - 500 MCM	4	3.45
CSPC-20-6	500 MCM	6	3.15
CSPC-28-4	500-800 MCM	4	5.75
CSPC-28-6	500-800 MCM	6	6.45
CSPC-34-6	750-1000 MCM	6	5.55
CSPC-34-8	750-1000 MCM	8	5.85

