


ALUMINUM TERMINALS

TYPE AFNTC

Straight Bolted
Pipe to Flat

Castings: 356-T6 Aluminum
Hardware: Aluminum Alloy
Options: See Page 211

Aluminum alloy terminal with hex head clamping bolts for connecting aluminum pipe to flat pad. Center-formed tongues. Clamping bolts have hex stops for one-wrench installation. Contact sealant is recommended.

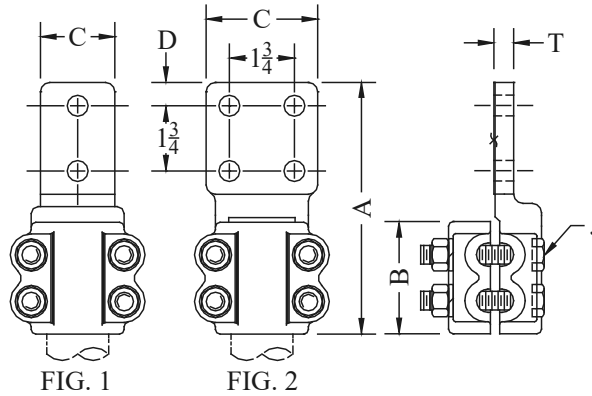

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES						WEIGHT (POUNDS)
			A	B	C	D	J	T	
AFNTC-30-2B	1	3/4	7-5/8	4	2	5/8	1/2	3/8	1.45
AFNTC-30-4A	2		7-7/8	4	3	5/8	1/2	3/8	1.85
AFNTC-30-4B	2		8-7/8	4	4	1-1/8	1/2	3/8	2.10
AFNTC-39-2B	1	1	6-1/2	3	2	5/8	1/2	1/2	1.55
AFNTC-39-4A	2		6-1/2	3	3	5/8	1/2	7/16	1.85
AFNTC-39-4B	2		8	3	4	1-1/8	1/2	1/2	2.40
AFNTC-49-2B	1	1-1/4	6-3/4	3	2	5/8	1/2	9/16	2.10
AFNTC-49-4A	2		6-3/4	3	3	5/8	1/2	9/16	1.85
AFNTC-49-4B	2		7-7/16	3	4	1-1/8	1/2	1/2	2.35
AFNTC-53-2B	1	1-1/2	6-7/8	3-1/8	2	5/8	1/2	1/2	2.10
AFNTC-53-4A	2		6-3/4	3-1/8	3	5/8	1/2	1/2	2.35
AFNTC-53-4B	2		8	3-1/8	4	1-1/8	1/2	1/2	3.25
AFNTC-58-2B	1	2	7-3/8	3-1/2	2	5/8	1/2	9/16	3.10
AFNTC-58-4A	2		7-3/8	3-1/2	3	5/8	1/2	9/16	3.10
AFNTC-58-4B	2		8-1/8	3-1/2	4	1-1/8	1/2	1/2	3.35
AFNTC-60-2B	1	2-1/2	7-1/4	3-1/2	2	5/8	1/2	11/16	3.35
AFNTC-60-4A	2		7-1/4	3-1/2	3	5/8	1/2	11/16	3.35
AFNTC-60-4B	2		8-5/16	3-1/2	4	1-1/8	1/2	11/16	3.35
AFNTC-62-2B	1	3	7-7/8	4	2	5/8	5/8	7/8	5.75
AFNTC-62-4A	2		7-7/8	4	3	5/8	5/8	7/8	5.75
AFNTC-62-4B	2		9-1/8	4	4	1-1/8	5/8	7/8	6.25
AFNTC-63-2B	1	3-1/2	8	4-3/8	2	5/8	5/8	1	7.00
AFNTC-63-4A	2		8	4-3/8	3	5/8	5/8	1	7.00
AFNTC-63-4B	2		8-7/8	4-3/8	4	1-1/8	5/8	1	7.50
AFNTC-64-2B	1	4	8-5/8	4-1/2	2	5/8	5/8	1	8.00
AFNTC-64-4A	2		8-5/8	4-1/2	3	5/8	5/8	1	8.00
AFNTC-64-4B	2		9-1/2	4-1/2	4	1-1/8	5/8	1	8.50
AFNTC-67-4A*	2	5	11-1/8	7	3	5/8	5/8	1-1/4	17.55
AFNTC-67-4B*	2		12-1/8	7	4	1-1/8	5/8	1-1/4	17.55
AFNTC-69-4A*	2	6	11-3/8	7	3	5/8	5/8	1-1/2	20.55
AFNTC-69-4B*	2		12-3/8	7	4	1-1/8	5/8	1-1/2	20.55

*Six Conductor-Clamping Bolts

SEFCOR