

ALUMINUM TERMINALS

TYPE ASFFT

Expansion
Pipe to Flat

Aluminum semi-flexible terminal with hex head clamping bolts for connecting aluminum pipe to flat. Aluminum pad surface is coated with contact sealant and factory bolted to laminated strap. Clamping bolts have hex-stops for one-wrench installation. Flat pad on laminated strap has NEMA drilling. Contact sealant is recommended. Contact pads are tin plated.

NOTE: This connector is not recommended as a support member.


Castings: 356-T6 Aluminum

Laminated Straps: Copper (Copper pads tin plated)

Hardware: Aluminum Alloy

Strap Mounting Hardware: Stainless Steel

Options: See Page 211

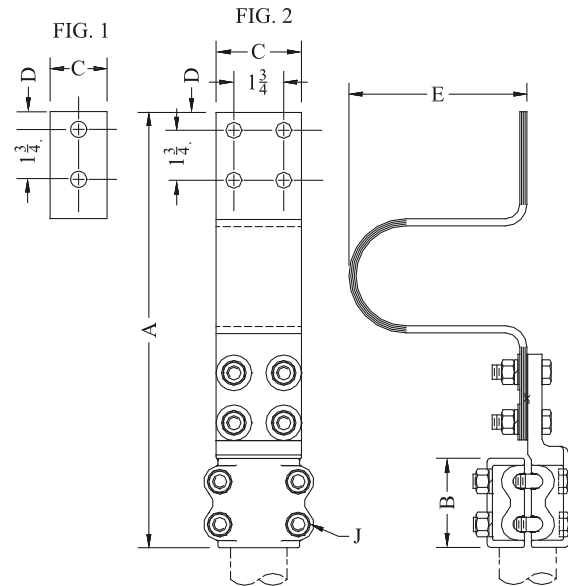

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES						WEIGHT (POUNDS)
			A	B	C	D	E	J	
ASFFT-30-2B	1	3/4	15-7/8	4	2	5/8	6-1/2	1/2	5.30
ASFFT-30-4A	2		14-3/8	2-3/8	3	5/8	6-1/4	1/2	7.75
ASFFT-39-2B	1	1	15	3	2	5/8	6-1/4	1/2	5.30
ASFFT-39-4A	2		15	3	3	5/8	6-1/4	1/2	7.75
ASFFT-49-2B	1	1-1/4	15-7/8	3	2	5/8	6-1/4	1/2	9.85
ASFFT-49-4A	2		15-3/4	3	3	5/8	6-1/4	1/2	9.85
ASFFT-53-2B	1	1-1/2	15-1/2	3-1/8	2	5/8	6-3/8	1/2	9.75
ASFFT-53-4A	2		15-1/4	3-1/8	3	5/8	6-1/4	1/2	8.30
ASFFT-53-4B	2		15-1/4	3-1/8	4	1-1/8	6-1/4	1/2	10.50
ASFFT-58-2B	1	2	16-1/2	3-1/2	2	5/8	7	1/2	12.65
ASFFT-58-4A	2		16-1/2	3-1/2	3	5/8	7	1/2	13.00
ASFFT-58-4B	2		17-3/4	3-1/2	4	1-1/8	5-3/4	1/2	14.80
ASFFT-60-2B	1	2-1/2	16-1/4	3-1/2	2	5/8	7-1/4	1/2	15.80
ASFFT-60-4A	2		16-1/2	3-1/2	3	5/8	7	1/2	15.80
ASFFT-60-4B	2		18-7/8	3-1/2	4	1-1/8	5-1/2	1/2	21.80
ASFFT-62-2B	1	3	16-5/8	4	2	5/8	7	5/8	16.75
ASFFT-62-4A	2		16-7/8	4	3	5/8	7-1/4	5/8	18.25
ASFFT-62-4B	2		19-1/8	4	4	1-1/8	8-1/2	5/8	29.70
ASFFT-63-4A	2	3-1/2	17-3/4	4-3/8	3	5/8	7-1/2	5/8	23.15
ASFFT-63-4B	2		19-1/2	4-3/8	4	1-1/8	8-1/2	5/8	31.00
ASFFT-64-4A	2	4	18-3/8	4-1/2	3	5/8	7-1/2	5/8	24.05
ASFFT-64-4B	2		19-3/4	4-1/2	4	1-1/8	8-1/2	5/8	32.00
ASFFT-67-4B*	2	5	23	6-3/4	4	1-1/8	8-1/8	5/8	52.70

*Six Conductor-Clamping Bolts

SEFCOR