

ALUMINUM TERMINALS

TYPE WFTI

Internal Weldment
Pipe to Flat

Castings: 356-T6 Aluminum
Options: See Page 211

Aluminum alloy weldment terminal for connecting standard (Schedule 40) aluminum pipe to flat pad. Flat pads have NEMA drilling. Contact sealant is recommended for contact pad after welding.

Angle connectors may be obtained by specifying desired angle.

Example: WFTI90-53-4A

For Schedule 80 Pipe Add Suffix (H)
to Catalog Number.

Example: WFTI-60H-2B

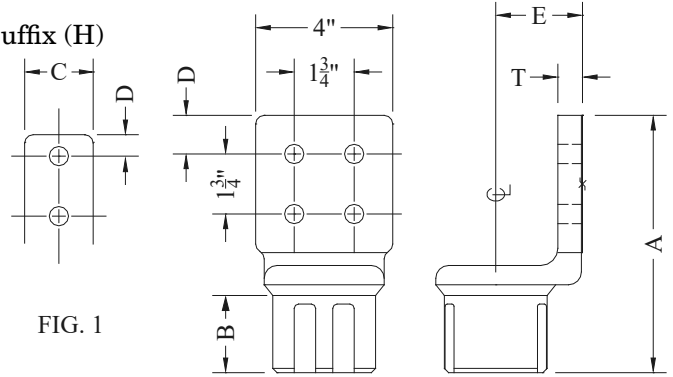


FIG. 1

FIG. 2

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES						WEIGHT (POUNDS)
			A	B	C	D	E	T	
WFTI-30-2B	1	3/4	4-3/4	1	2	5/8	3/4	3/8	.40
WFTI-30-4A	2		4-3/4	1	3	5/8	3/4	3/8	.40
WFTI-30-4B	2		5-3/4	1	4	1-1/8	3/4	3/8	.65
WFTI-39-2B	1	1	4-7/8	1-1/8	2	5/8	1	3/8	.50
WFTI-39-4A	2		4-7/8	1-1/8	3	5/8	1	3/8	.50
WFTI-39-4B	2		5-7/8	1-1/8	4	1-1/8	1	3/8	.75
WFTI-49-2B	1	1-1/4	5	1-1/4	2	5/8	1-1/4	3/8	.65
WFTI-49-4A	2		5	1-1/4	3	5/8	1-1/4	3/8	.65
WFTI-49-4B	2		6	1-1/4	4	1-1/8	1-1/4	3/8	.90
WFTI-53-2B	1	1-1/2	5-1/8	1-3/8	2	5/8	1-1/2	1/2	1.25
WFTI-53-4A	2		5-1/8	1-3/8	3	5/8	1-1/2	1/2	1.25
WFTI-53-4B	2		6-1/8	1-3/8	4	1-1/8	1-1/2	1/2	1.25
WFTI-58-2B	1	2	5-1/4	1-1/2	2	5/8	1-3/4	1/2	1.50
WFTI-58-4A	2		5-1/4	1-1/2	3	5/8	1-3/4	1/2	1.50
WFTI-58-4B	2		6-1/2	1-3/4	4	1-1/8	1-3/4	1/2	1.50
WFTI-60-2B	1	2-1/2	6-1/8	2-1/8	2	5/8	2	5/8	1.65
WFTI-60-4A	2		5-7/8	2-1/8	3	5/8	2	9/16	1.65
WFTI-60-4B	2		6-7/8	2-1/8	4	1-1/8	2	5/8	2.50
WFTI-62-2B	1	3	6-1/2	2-3/8	2	5/8	2-1/2	3/4	3.00
WFTI-62-4A	2		6-1/2	2-3/8	3	5/8	2-1/2	3/4	3.00
WFTI-62-4B	2		7-1/2	2-1/4	4	1-1/8	2-1/2	15/16	3.00
WFTI-63-2B	1	3-1/2	6-7/8	2-3/4	2	5/8	2-5/8	5/8	3.50
WFTI-63-4A	2		6-7/8	2-3/4	3	5/8	2-5/8	5/8	3.50
WFTI-63-4B	2		7-7/8	2-3/4	4	1-1/8	2-5/8	5/8	3.50
WFTI-64-2B	1	4	6-1/8	2-1/4	2	5/8	2-7/8	3/4	3.55
WFTI-64-4A	2		6-1/8	2-1/4	3	5/8	2-7/8	3/4	3.55
WFTI-64-4B	2		7-1/8	2-1/4	4	1-1/8	2-7/8	3/4	3.55
WFTI-67-4A	2	5	7	2-3/4	3	5/8	3-1/2	7/8	6.75
WFTI-67-4B	2		8	2-3/4	4	1-1/8	3-1/2	7/8	6.75
WFTI-69-4B	2	6	8-7/8	3	4	1-1/8	3-1/2	7/8	12.00