


ALUMINUM TERMINALS

TYPE WFTIC

Internal Weldment
Pipe to Flat

Castings: 356-T6 Aluminum
Options: See Page 211

Aluminum alloy weldment terminal for connecting standard (Schedule 40) aluminum pipe to flat pad. Center-formed tongues have NEMA drilling. Contact sealant is recommended for contact pad after welding.
For Schedule 80 pipe add suffix (H) to catalog number.
Example: WFTIC 58H-2B

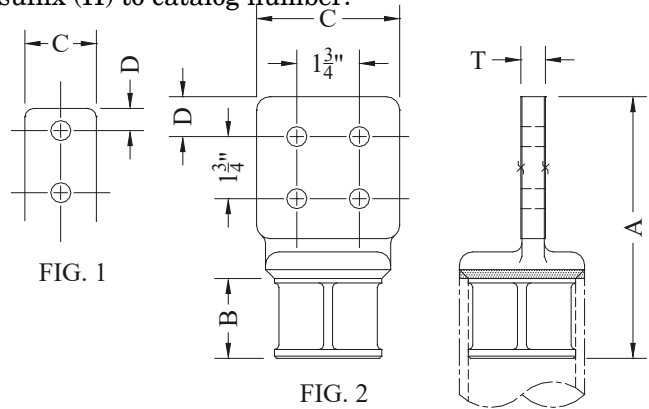

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES					WEIGHT (POUNDS)
			A	B	C	D	T	
WFTIC-30-2B	1	3/4	4-1/2	3/4	2	5/8	3/8	.30
WFTIC-30-4A	2		4-1/2	3/4	3	5/8	3/8	.30
WFTIC-30-4B	2		5-1/2	3/4	4	1-1/8	3/8	.50
WFTIC-39-2B	1	1	4-5/8	3/4	2	5/8	3/8	.40
WFTIC-39-4A	2		4-5/8	3/4	3	5/8	3/8	.40
WFTIC-39-4B	2		5-5/8	3/4	4	1-1/8	3/8	.60
WFTIC-49-2B	1	1-1/4	4-3/4	7/8	2	5/8	3/8	.25
WFTIC-49-4A	2		4-3/4	7/8	3	5/8	3/8	.75
WFTIC-49-4B	2		5-3/4	7/8	4	1-1/8	3/8	.75
WFTIC-53-2B	1	1-1/2	5-1/4	1-1/4	2	5/8	1/2	1.00
WFTIC-53-4A	2		5-3/8	1-1/4	3	5/8	1/2	1.50
WFTIC-53-4B	2		6-3/8	1-1/4	4	1-1/8	1/2	1.85
WFTIC-58-2B	1	2	5-1/4	1-1/4	2	5/8	1/2	1.00
WFTIC-58-4A	2		5-1/4	1-1/4	3	5/8	1/2	1.00
WFTIC-58-4B	2		6-1/4	1-1/4	4	1-1/8	3/8	2.00
WFTIC-60-2B	1	2-1/2	6-1/4	2-1/8	2	5/8	1/2	1.50
WFTIC-60-4A	2		6-1/8	2-1/8	3	5/8	1/2	1.50
WFTIC-60-4B	2		7-1/8	2-1/8	4	1-1/8	1/2	1.75
WFTIC-62-2B	1	3	6-3/8	2-1/4	2	5/8	11/16	2.00
WFTIC-62-4A	2		6-3/8	2-1/4	3	5/8	11/16	2.00
WFTIC-62-4B	2		7-3/8	2-1/4	4	1-1/8	5/8	2.50
WFTIC-63-2B	1	3-1/2	7	2-3/4	2	5/8	5/8	3.50
WFTIC-63-4A	2		7	2-3/4	3	5/8	5/8	3.50
WFTIC-63-4B	2		8	2-3/4	4	1-1/8	5/8	3.50
WFTIC-64-2B	1	4	6-7/8	2-1/2	2	5/8	3/4	4.00
WFTIC-64-4A	2		6-7/8	2-1/2	3	5/8	3/4	3.25
WFTIC-64-4B	2		7-7/8	2-1/2	4	1-1/8	3/4	4.40
WFTIC-67-4A	2	5	7-3/8	2-3/4	3	5/8	1	5.25
WFTIC-67-4B	2		8-3/8	2-3/4	4	1-1/8	1	5.25
WFTIC-69-4B	2	6	8-7/8	3	4	1-1/8	1-1/4	7.00