

# COMPRESSION CONNECTORS



## TYPE CL

Compression Terminal  
Copper Cable to Flat

A pure copper compression terminal for use with copper cable. Tinned contact pad may be specified by adding suffix (-TP) to catalog number. Contact sealant is factory-applied to cable bore, and connector is shipped in a sealed plastic bag.

Contact factory for sizes not listed.

Angle connector may be obtained by adding desired angle to catalog number. (CL-20-2B-90).

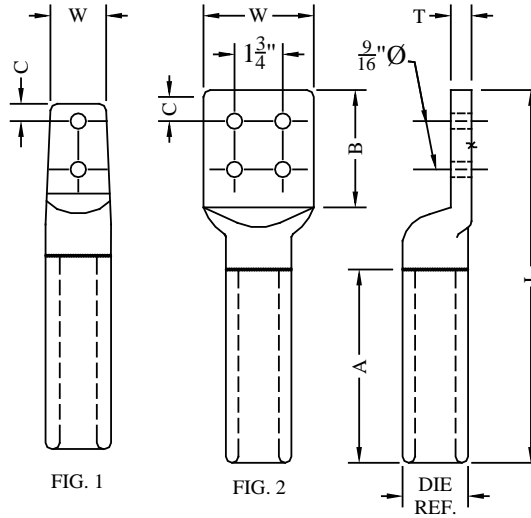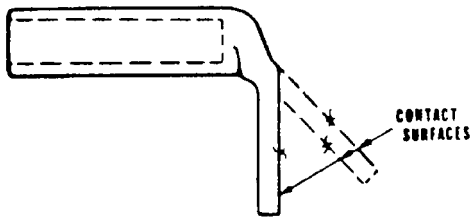


CATALOG NUMBER	FIG. NO.	COPPER CONDUCTOR	DIE REF.	DIMENSION - INCHES						WEIGHT (POUNDS)	
				A	B	C	L	T	W		
CL-04-2A	1	#4 STR.	.640 B73AH	2	3-1/4	5/8	6-1/8	1/4	1-1/4	0.55	
CL-06-2A	1	#2 STR.		2	3-1/4	5/8	6-1/8	1/4	1-1/4	0.55	
CL-08-2A	1	1/0 STR.		3	3-1/4	5/8	7-1/8	1/4	1-1/4	0.60	
CL-09-2A	1	2/0 STR.	.840 74AH 249	3	3-1/8	5/8	7-1/4	5/16	1-1/2	1.05	
CL-09-4A	2			3	3-1/8	5/8	7-1/4	1/4	3	1.30	
CL-10-2A	1	3/0 STR.		3	3-1/4	5/8	7-1/2	3/8	1-1/2	1.10	
CL-10-4A	2			3	3-1/8	5/8	7-1/4	1/4	3	1.25	
CL-11-2A	1	4/0 STR.		3	3-1/8	5/8	7-1/4	5/16	1-1/2	0.95	
CL-11-4A	2			3	3-1/8	5/8	7-1/4	1/4	3	1.20	
CL-12-2A	1	250 MCM		3	3-1/8	5/8	7-1/4	3/8	1-1/2	1.00	
CL-12-4A	2			3	3-1/2	5/8	7-5/8	1/4	3	1.15	
CL-14-2A	1	300 MCM		1.000 75AH 251	3	3-1/4	5/8	7-3/8	3/8	1-1/2	1.25
CL-14-4A	2				3	3-1/4	5/8	7-3/8	1/4	3	1.45
CL-16-2A	1	350 MCM	3		3-1/4	5/8	7-3/8	3/8	1-1/2	1.20	
CL-16-4A	2		3		3-1/4	5/8	7-3/8	5/16	3	1.55	
CL-17-2B	1	400 MCM	1.125 76AH 316		4	3-1/4	5/8	8-1/2	3/8	1-3/4	1.75
CL-17-4A	2				4	3-1/4	5/8	8-1/2	5/16	3	2.00
CL-19-2B	1	450 MCM		4	3-1/4	5/8	8-1/2	3/8	1-3/4	1.65	
CL-19-4A	2			4	3-1/4	5/8	8-1/2	5/16	3	1.90	
CL-20-2B	1	500 MCM		4	3-1/4	5/8	8-1/2	3/8	1-3/4	1.60	
CL-20-4A	2			4	3-1/4	5/8	8-1/2	5/16	3	1.85	
CL-22-2B	1	600 MCM		1.312 20AH 317	5	3-1/4	5/8	9-1/2	1/2	2	2.60
CL-22-4A	2				5	3-1/4	5/8	9-1/2	3/8	3	2.70

# COMPRESSION CONNECTORS

## TYPE CL CONTINUED

For 2" x 3" pad, substitute 2B in catalog number.

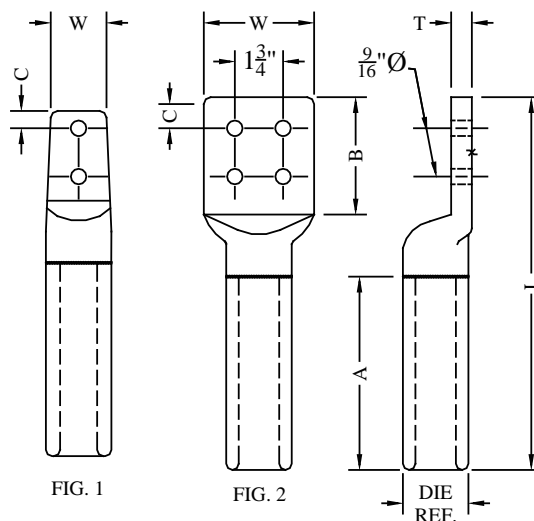

CATALOG NUMBER	FIG. NO.	COPPER CONDUCTOR	DIE REF.	DIMENSION - INCHES						WEIGHT (POUNDS)	
				A	B	C	L	T	W		
CL-23-4A	2	650 MCM	1.312 20AH 317	4	3-1/4	5/8	8-5/8	3/8	3	2.45	
CL-23-4B	2			4	4-1/4	1-1/8	9-5/8	3/8	4	3.35	
CL-25-4A	2	700 MCM		4-1/4	3-1/4	5/8	8-5/8	3/8	3	2.35	
CL-25-4B	2			4-1/4	3-1/4	1-1/8	11-1/8	3/8	4	2.65	
CL-27-4A	2	750 MCM		4-1/4	3-1/4	5/8	8-5/8	3/8	3	2.25	
CL-27-4B	2			5-1/2	4-1/4	1-1/8	11-1/8	3/8	4	3.45	
CL-28-4A	2	800 MCM		4-1/2	3-1/4	5/8	9-1/8	3/8	3	3.15	
CL-28-4B	2			5-1/2	4-1/4	1-1/8	11-1/8	3/8	4	3.25	
CL-30-4A	2	850 MCM		4-1/2	3-1/4	5/8	9-1/8	3/8	3	3.05	
CL-30-4B	2			4-1/2	4-1/4	1-1/8	11-1/8	3/8	4	3.95	
CL-32-4A	2	900 MCM		4-1/4	3-1/4	5/8	8-7/8	3/8	3	2.90	
CL-32-4B	2			5-1/2	4-1/4	1-1/8	11-1/8	3/8	4	4.10	
CL-33-4A	2	950 MCM	5-1/2	3-1/4	5/8	10-1/8	3/8	3	3.85		
CL-33-4B	2		5-1/2	4-1/4	1-1/8	11-1/8	3/8	4	4.00		
CL-34-4A	2	1000 MCM	4-1/2	3-1/4	5/8	9-1/8	3/8	3	2.80		
CL-34-4B	2		5-1/2	4-1/4	1-1/8	11-1/8	3/8	4	3.60		
CL-38-4A	2	1250 MCM	1.843 30AH 292	5-1/2	3-1/4	5/8	11	1/2	3	5.65	
CL-38-4B	2		5-1/2	4-1/4	1-1/8	11-1/4	1/2	4	6.15		
CL-42-4A	2	1500 MCM	2.125 34AH 575	7-1/4	3-1/4	5/8	12-1/2	3/4	3	8.85	
CL-42-4B	2			7	4-1/4	1-1/8	13-1/4	5/8	4	9.80	
CL-45-4A	2	1750 MCM		7-1/4	3-1/4	5/8	12-3/4	3/4	3	8.20	
CL-45-4B	2			7-1/4	4-1/4	1-1/8	14	1/2	4	9.25	
CL-48-4A	2	2000 MCM		2.375 38AH 478	7-1/4	3-1/4	5/8	13	3/4	3	10.90
CL-48-4B	2			7-1/4	4-1/4	1-1/8	14	3/4	4	12.65	