


GROUND CONNECTORS

TYPE GCK

Parallel Connector
Single U-Bolt

Castings: Electrical Bronze
Hardware: Silicon Bronze

All-bronze parallel clamp for static wire connections. Top saddle is captive on U-bolt.

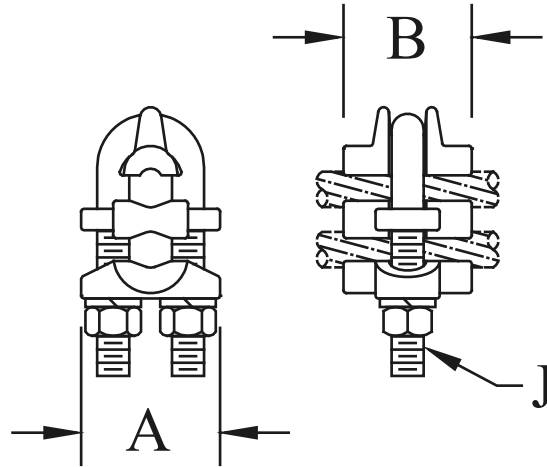


CATALOG NUMBER	CONDUCTOR RANGE (BOTH GROOVES)	DIMENSIONS - INCHES			WEIGHT (POUNDS)
		A	B	J	
GCK-4848	#2 SOL - 2/0 STR	1-5/8	1-1/2	3/8	0.75
GCK-5050	#1 STR - 4/0 STR	1-7/8	1-1/2	3/8	0.95
GCK-5252	1/0 SOL - 300 MCM	2	1-3/8	3/8	0.90
GCK-5656	4/0 SOL - 500 MCM	2-9/16	2-1/8	1/2	1.30

TYPE XBG

Grounding Strap
Flexible Braid

Braid: Tinned Copper
Ferrules: Tinned Copper

Flexible tinned copper grounding strap for use with Types GBR, and GU1 ground clamps. Ferrules are solder-dipped after pressing, to form a solidly bonded mass full length of the ferrule. Ferrule surfaces are tinned. Additional strap lengths (L) may be obtained by substituting the required dimension (in inches) in catalog number.

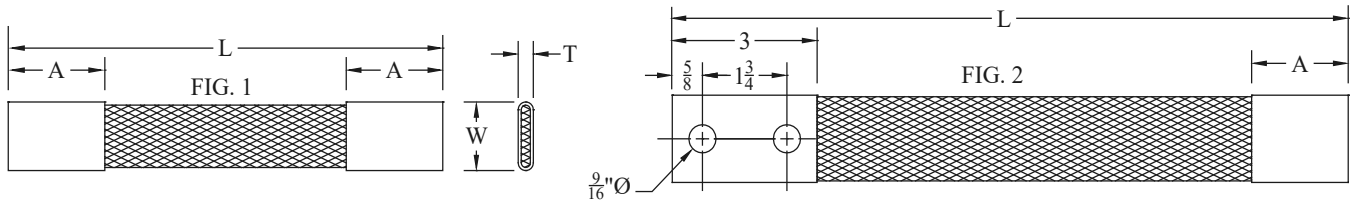

CATALOG NUMBER	FIG. NO.	CIRCULAR MILS.	DIMENSIONS - INCHES				WEIGHT (POUNDS)
			A	L	T	W	
XBG76-B-12	1	77,000	2-1/4	12	3/16	7/8	0.40
XBG76-B-18	1	77,000	2-1/4	18	3/16	7/8	0.55
XBG76-B-24	1	77,000	2-1/4	24	3/16	7/8	0.65
XBG76-D-18	2	76,400	3	18	3/16	1-1/16	0.60
XBG76-D-24	2	76,400	3	24	3/16	1-1/16	0.75
XBG146-B-18	1	150,000	2-1/4	18	5/16	1-3/8	1.10
XBG146-B-24	1	150,000	2-1/4	24	5/16	1-3/8	1.35
XBG146-D-18	2	150,000	3	18	5/16	1-3/8	1.20
XBG146-D-24	2	150,000	3	24	5/16	1-3/8	1.45
XBG146-D-30	2	150,000	3	30	5/16	1-5/8	1.70