

EHV BUS SUPPORTS


ALUMINUM • 345kV

Type AVCA-HV is designed for corona-free service at 345kV.

TYPE AVCA-HV
 Bolted - Single Cable
 To Insulator

Castings: 356-T6 Aluminum

Mounting Hardware: Galvanized Steel

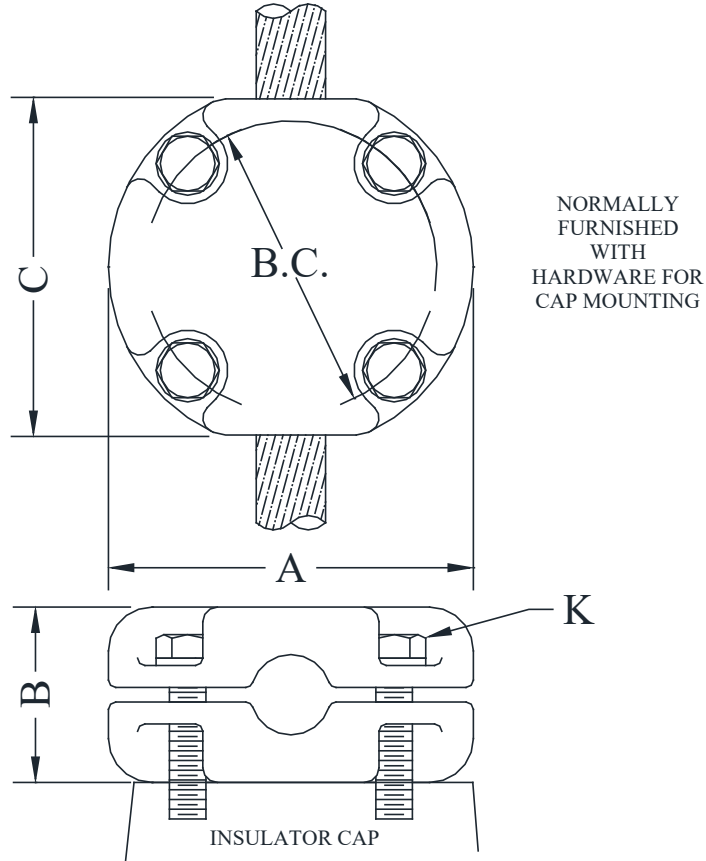

CATALOG NUMBER	CONDUCTOR DIAMETER	BOLT CIRCLE	DIMENSIONS - INCHES				WEIGHT (POUNDS)
			A	B	C	K	
AVCA-HV-29-5	.930 - 1.031	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-33-5	1.040 - 1.126	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-34-5	1.040 - 1.185	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-36-5	1.141 - 1.250	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-39-5	1.259 - 1.375	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-43-5	1.376 - 1.500	5	6-1/4	3	5-3/4	5/8	6.10
AVCA-HV-46-5	1.504 - 1.625	5	6-1/4	3	5-3/4	5/8	6.10