


ALUMINUM TERMINALS

TYPE WFC3

Straight Welded
Three Cables to Flat

Aluminum alloy weldment terminal for connecting three aluminum cables to flat pad.
Flat pads have NEMA drilling.
Contact sealant is recommended for contact pad after welding.
Angle connectors may be obtained by specifying the desired angle.
Example: WFC3-90-34-4B

Castings: 356-T6 Aluminum
Options: See Page 210

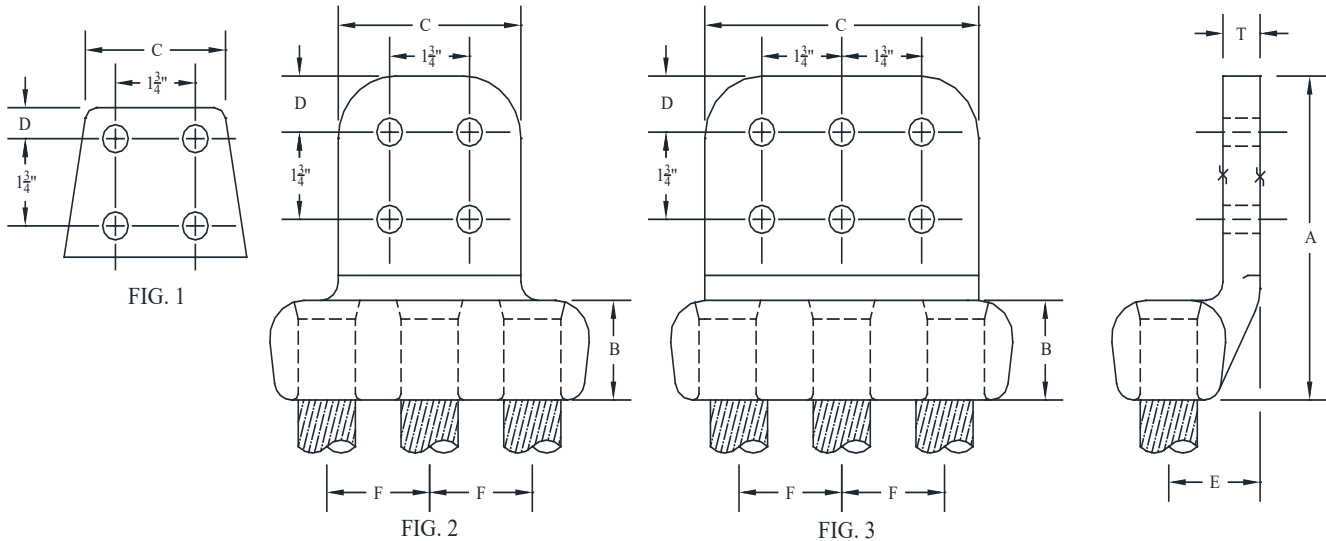

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE		DIMENSIONS - INCHES							WEIGHT (POUNDS)
		AAC	ACSR	A	B	C	D	E	F	T	
WFC3-34-4A	1	954 - 1033 MCM	795 - 945(45/7) MCM	5-1/2	2	3	5/8	2	2-1/4	13/16	3.82
WFC3-34-4B	2			6-1/2	2	4	1-1/8	2	2-1/4	13/16	3.82
WFC3-36-4B	2	1000 - 1113 MCM	900 - 1033 MCM	6-1/2	2	4	1-1/8	2	2-1/2	7/8	4.30
WFC3-36-6B	3			6-1/2	2	6	1-1/8	2	2-1/2	7/8	4.75
WFC3-39-4A	1	1250 - 1300 MCM	1113 - 1192 MCM	5-7/8	2-3/8	3	5/8	2-1/8	2-1/8	1	5.00
WFC3-39-4B	2			6-7/8	2-3/8	4	1-1/8	2-1/8	2-1/8	1	5.00
WFC3-39-6B	3			6-7/8	2-3/8	6	1-1/8	2-1/8	2-1/8	7/8	3.75
WFC3-41-4B	2	1250 - 1510 MCM	1192 - 1272 MCM	6-7/8	2-3/8	4	1-1/8	2-1/8	2-1/8	1	5.00
WFC3-41-6B	3			6-7/8	2-3/8	6	1-1/8	2-1/8	2-1/8	7/8	5.00
WFC3-43-4A	1	1590 MCM	1272 MCM	6-1/8	2-1/2	3	5/8	2	2	1	4.60
WFC3-43-4B	2			7-1/8	2-1/2	4	1-1/8	2	2	1	4.60
WFC3-43-6B	3			7	2-5/8	6	1-1/8	2	2	3/4	5.50
WFC3-46-4A	1	1750 MCM	1590 MCM	7-1/8	2-3/4	3	5/8	2-1/16	2-1/4	1	7.00
WFC3-46-4B	2			7-1/8	2-3/4	4	1-1/8	2-1/16	2-1/4	1	7.00
WFC3-46-6B	3			7-1/8	2-3/4	6	1-1/8	2-1/16	2-1/4	1	7.00