


ALUMINUM TEE CONNECTORS

TYPE ACF

Straight Bolted
Cable Main to Flat Pad Tap

Castings: 356-T6 Aluminum
Hardware: Aluminum Alloy

Aluminum alloy tee for aluminum cable to flat bar pads. NEMA hole drilling is standard. Clamping bolts have hex-stops for one-wrench installation. Contact sealant is recommended. Also available for two cables to fat bar. Example: ACF2-13-2B
Wide cable ranges using reversible caps are available and are listed at the end of the table.

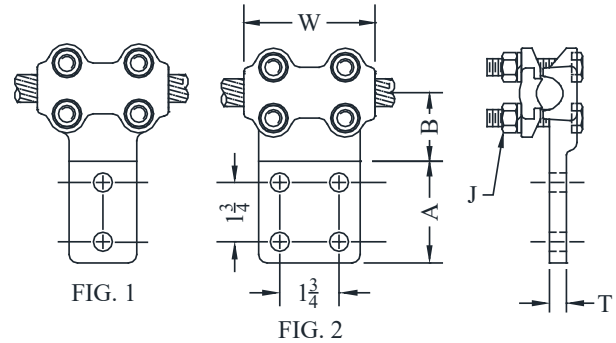

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE		PAD WIDTH	DIMENSIONS - INCHES					WEIGHT (POUNDS)
		AAC	ACSR		A	B	W	T	J	
ACF-13-2B	1	#4 - 266 MCM	#4 - 4/0 MCM	2	3	1-3/4	3	5/16	1/2	1.25
ACF-13-4A	2			3	3	1-3/4	3	5/16	1/2	1.25
ACF-13-4B	2			4	4	3-1/2	3	3/8	1/2	1.95
ACF-20-2B	1	4/0 - 500 MCM	4/0 - 397 MCM	2	3	1-7/8	3-1/2	1/2	1/2	1.80
ACF-20-4A	2			3	3	1-7/8	3-1/2	1/2	1/2	1.80
ACF-20-4B	2			4	4	1-9/16	3-1/2	1/2	1/2	2.30
ACF-24-2B	1	350 - 650 MCM	267-556 MCM	2	3	2-1/8	4	1/2	1/2	1.80
ACF-24-4A	2			3	3	2	4	1/2	1/2	1.80
ACF-24-4B	2			4	4	2-1/8	4	5/16	1/2	2.30
ACF-34-2B	1	550 - 1000 MCM	477 - 795 MCM	2	3	2-1/8	4	5/8	1/2	2.55
ACF-34-4A	2			3	3	2-1/8	4	5/8	1/2	2.55
ACF-34-4B	2			4	4	2-1/8	4	5/8	1/2	2.70
ACF-39-2B	1	874-1300 MCM	715 - 1113 MCM	2	3	2-1/2	4-1/4	1/2	1/2	1.85
ACF-39-4A	2			3	3	2-1/4	4-1/4	5/8	1/2	2.10
ACF-39-4B	2			4	4	2	4-1/4	5/8	1/2	2.95
ACF-43-2B	1	1250 - 1590 MCM	1113 - 1431 MCM	2	3	2-1/2	4-1/2	3/4	1/2	3.15
ACF-43-4A	2			3	3	2-1/2	4-1/2	3/4	1/2	3.15
ACF-43-4B	2			4	4	2-1/4	4-1/2	3/4	5/8	3.90
ACF-46-2B	1	1250 - 1800 MCM	1113 - 1590 MCM	2	3	4-3/4	4-3/4	3/4	5/8	4.25
ACF-46-4A	2			3	3	2-3/8	4-3/4	3/4	5/8	4.25
ACF-46-4B	2			4	4	4-3/4	4-3/4	3/4	5/8	4.25
ACF-49-2B	1	1500 - 2000 MCM	1272 - 2034 MCM	2	3	2-1/4	4-3/4	3/4	5/8	5.25
ACF-49-4A	2			3	3-1/2	2-1/4	4-3/4	3/4	5/8	5.25
ACF-49-4B	2			4	4	2-1/4	4-3/4	3/4	5/8	5.25
ACF-56-4B*	---	2000 - 3500 MCM	2034 - 3064 MCM	4	4	2-11/16	6	1	5/8	7.75
ACF-1139-2B	1	4/0 - 1431 MCM	4/0 - 1272 MCM	2	3	2-1/2	4-1/4	1/2	1/2	2.10
ACF-1139-4A	2			3	3	2-1/4	4-1/4	5/8	1/2	2.35
ACF-1139-4B	2			4	4	2	4-1/4	5/8	1/2	3.20
ACF-1020-4A	2	#1 - 500 MCM	#2 - 397.5 MCM	3	3	1-7/8	3-1/2	1/2	1/2	1.80
ACF-3653-4B	2	CONTACT FACTORY FOR DETAILS								

* Six clamping bolts per cap

SEFCOR