


ALUMINUM TEE CONNECTORS

TYPE ACRCT

Straight Bolted
Cable Main to Cable Tap

Castings: 356-T6 Aluminum
Hardware: Aluminum Alloy

Aluminum alloy tee for aluminum cable to cable connections. Clamping bolts have hex-stops for one-wrench installation. Contact sealant is recommended. Wide cable ranges using reversible caps are available and are listed at the end of the table.

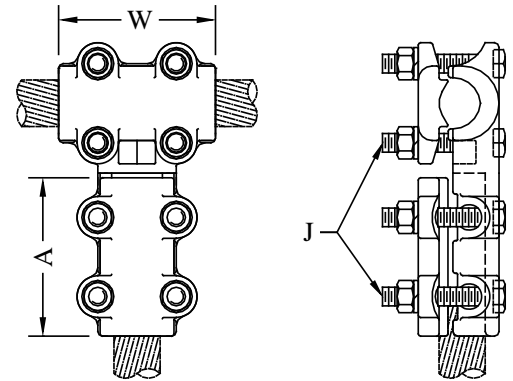

CATALOG NUMBER	DIMENSIONS				DIMENSIONS INCHES			WEIGHT (POUNDS)
	CABLE MAIN (MCM)		CABLE TAP (MCM)		A	W	J	
	AAC	ACSR	AAC	ACSR				
ACRCT-1313	#4-266	#4-4/0	#4-266	#4-4/0	3	3	1/2	1.55
ACRCT-2013	4/0-500	4/0-397	#4-266	#4-4/0	2-7/8	3-1/2	1/2	2.05
ACRCT-2020			4/0-500	4/0-397	3-1/2	3-1-2	1/2	2.35
ACRCT-2413	350-650	336-556	#4-266	#4-4/0	3	4	1/2	2.30
ACRCT-2420			4/0-500	4/0-397	3-1/2	4	1/2	2.60
ACRCT-2424			350-650	336-556.4	4	4	1/2	2.60
ACRCT-3413	550-1000	477-795	#4-266	#4-4/0	3	4	1/2	2.35
ACRCT-3420			4/0-500	4/0-397	3-1/2	4	1/2	2.85
ACRCT-3424			350-650	336-556.4	4	4	1/2	3.05
ACRCT-3434			550-1000	477-795	4	4	1/2	3.15
ACRCT-3913	900-1300	715-1113	#4-266	#4-4/0	3	4-1/4	1/2	2.55
ACRCT-3920			4/0-500	4/0-397	3-1/2	4-1/4	1/2	2.90
ACRCT-3924			350-650	336-556.4	4	4-1/4	1/2	3.90
ACRCT-3934			550-1000	477-795	4	4-1/4	1/2	4.05
ACRCT-3939			874.5-1300	715.5-1113	4-1/4	4-1/4	1/2	3.00
ACRCT-4313	1250-1590	1113-1431	#4-266	#4-4/0	3	4-1/2	1/2	3.65
ACRCT-4320			4/0-500	4/0-397	3-1/2	4-1/2	1/2	4.15
ACRCT-4324			350-650	336-556.4	4	4-1/2	1/2	3.90
ACRCT-4334			550-1000	477-795	4	4-1/2	1/2	3.95
ACRCT-4339			874.5-1300	715.5-1113	4-1/4	4-1/2	1/2	3.95
ACRCT-4343			1250-1590	1113-1431	4-1/2	4-1/2	5/8	5.30
ACRCT-4646	1250-1800	1113-1590	1250-1800	1113-1590	4-3/4	4-3/4	5/8	5.55
ACRCT-4949	1500-2000	1272-2034	1500-2000	1272-2034	4-3/4	4-3/4	5/8	8.30
ACRCT-5656*	2000-2500	1780-2156	2000-2500	1780-2156	6	6	5/8	9.80
ACRCT-1020-1020	#1-500	#2-397.5	#1-500	#2-397.5	3-1/2	3-1/2	1/2	2.35
ACRCT-1139-1020	4/0-1113	4/0-1113			4	4	1/2	3.15
ACRCT-1139-1139					4/0-1300	4/0-1272	4-1/4	4-1/4
ACRCT-3653-3653	1100-2500	1113-2300	1100-2500	1113-2300	4	6-3/4	5/8	6.40

* Six clamping bolts per cap

SEFCOR