

EHV TEE CONNECTORS

ALUMINUM • 345 - 500kV

TYPE AVTHV-15


TYPE ATTHV-15

Bolted "A" Frame Connectors

Types AVTHV & ATTHV are designed for corona-free service through 500kV. They are commonly used for removable A-frame assemblies. When braces are required, weldment tees (see WFTT15) are recommended. Shipped with inhibitor - coated contact surfaces.

Castings: 356-T6 Aluminum

Clamping Hardware: Aluminum Alloy

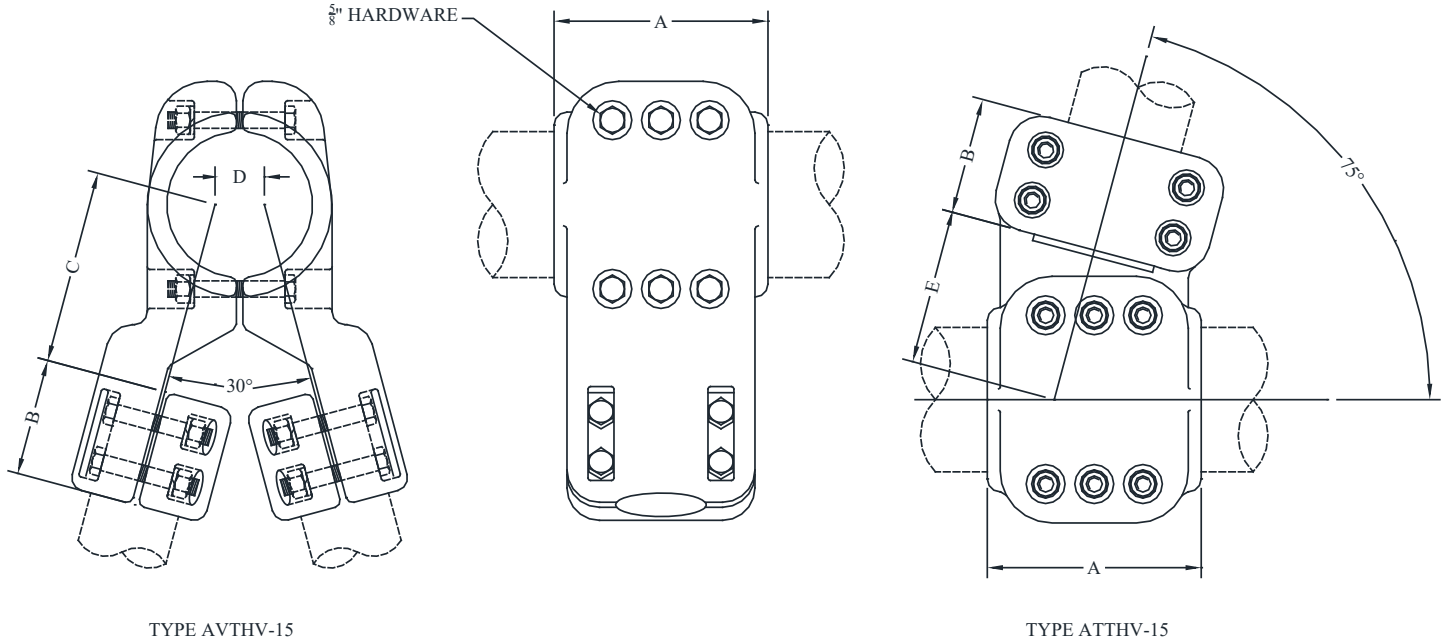

CATALOG NUMBER		PIPE SIZE (NPS)		DIMENSIONS - INCHES				
TYPE AVTHV-15	TYPE ATTHV-15	MAIN	TAP(S)	A	B	C	D	E
*AVTHV-15-6462	ATTHV-15-6462	4	3	4-1/2	4-1/2	6-1/2	3	5-1/4
AVTHV-15-6762	ATTHV-15-6762	5	3	8-1/4	4-1/2	7	2	5-3/4
AVTHV-15-6763	ATTHV-15-6763		3-1/2	8-1/4	4-1/2	7	3	5-7/8
AVTHV-15-6764	ATTHV-15-6764		4	8-1/4	4-1/2	7	3	6
AVTHV-15-6962	ATTHV-15-6962	6	3	7	4-1/2	7-1/2	2	6-1/4
AVTHV-15-6963	ATTHV-15-6963		3-1/2	7	4-1/2	7-1/2	2	6-1/4
AVTHV-15-6964	ATTHV-15-6964		4	7	4-1/2	7-1/2	3	6-1/2

*Four clamping bolts on main