


# BRONZE TEE CONNECTORS

## TYPE TFT

Straight Bolted  
Pipe Main to  
Flat Pad Tap

Castings: Electrical Bronze  
Hardware: Silicon Bronze

Bronze alloy tee for connecting copper pipe main to flat pads. NEMA hole drilling is standard.  
Clamping bolts have hex-stops for one-wrench installation.

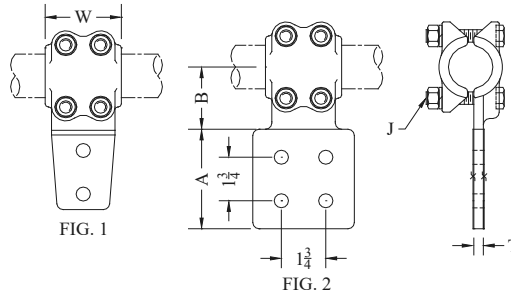

CATALOG NUMBER	CONDUCTOR SIZE		DIMENSIONS-INCHES					WEIGHT (POUNDS)
	PIPE MAIN (NPS)	PAD WIDTH	A	B	W	T	J	
TFT-30-2B	3/4	2	3	1-7/8	2-3/8	3/8	1/2	4.50
TFT-30-4A		3	3	1-7/8	2-3/8	3/8	1/2	5.75
TFT-30-4B		4	4	2-1/4	4	7/16	1/2	6.75
TFT-39-2B	1	2	3	2	3	1/2	1/2	5.75
TFT-39-4A		3	3-3/8	1-3/4	3	1/2	1/2	5.85
TFT-39-4B		4	4-3/8	1-3/4	3	1/2	1/2	6.40
TFT-49-2B	1-1/4	2	3	2-3/8	3	9/16	1/2	6.60
TFT-49-4A		3	3	2-3/8	3	9/16	1/2	6.60
TFT-49-4B		4	4	2-1/2	3	3/8	1/2	6.60
TFT-53-2B	1-1/2	2	3	2-5/8	3	7/16	1/2	7.90
TFT-53-4A		3	3	2-5/8	3	7/16	1/2	7.90
TFT-53-4B		4	4	2-1/4	3	1/2	1/2	8.15
TFT-58-2B	2	2	3	2-3/4	3-1/2	5/8	1/2	10.70
TFT-58-4A		3	3	2-3/4	3-1/2	9/16	1/2	8.35
TFT-58-4B		4	4	2-3/4	3-1/2	7/16	1/2	9.50
TFT-60-2B	2-1/2	2	3	3-1/4	3-1/2	1/2	1/2	9.85
TFT-60-4A		3	3	3-1/4	3-1/2	1/2	1/2	9.85
TFT-60-4B		4	4	3-1/4	3-1/2	1/2	1/2	9.85
TFT-62-2B	3	2	3	3-3/8	3-1/2	1	1/2	10.35
TFT-62-4A		3	3	3-3/8	3-1/2	3/4	1/2	10.45
TFT-62-4B		4	4	3-1/4	3-1/2	3/4	1/2	13.45
TFT-63-2B	3-1/2	2	3	4	4-1/2	5/8	5/8	16.75
TFT-63-4A		3	3	4	4-1/2	5/8	5/8	16.75
TFT-63-4B		4	4	4-1/16	4-1/2	5/8	5/8	16.75
TFT-64-2B	4	2	3	3-3/4	3-1/4	3/4	5/8	26.05
TFT-64-4A		3	3	4-1/2	4-1/2	3/4	5/8	26.05
TFT-64-4B		4	4	4-1/2	4-1/2	3/4	5/8	26.05
TFT-67-2B	5	2	3	5-3/8	4-3/4	1	5/8	37.20
TFT-67-4A		3	3	5-3/8	4-3/4	1	5/8	37.70
TFT-67-4B		4	4	5-3/8	4-3/4	1	5/8	38.80
TFT-69-2B	6	2	3	5-1/2	7	1-1/8	5/8	50.45
TFT-69-4A		3	3	5-1/2	7	1-1/8	5/8	51.00
TFT-69-4B		4	4	5-1/2	7	1-1/8	5/8	52.25