



ALUMINUM COUPLERS

TYPE ACCC

Straight Bolted
Cable Main to Cable Tap

Aluminum alloy straight coupler for aluminum cable to cable connections.
Clamping bolts have hex-stops for one wrench installation.
Contact sealant is recommended.
* ACCC-1139-1139 has reversible caps for a wide range of cable.

Castings: 356-T6 Aluminum
Hardware: Aluminum Alloy

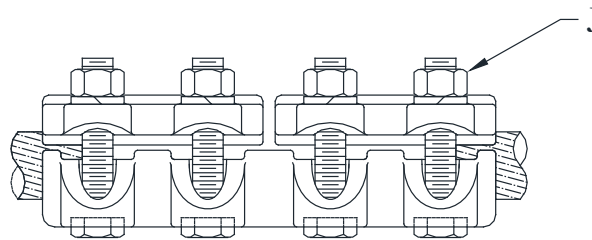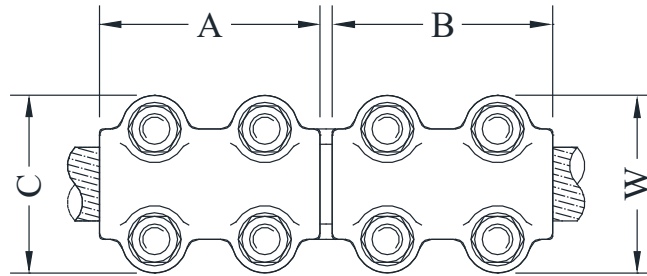

CATALOG NUMBER	CONDUCTOR RANGE		DIMENSIONS - INCHES					WEIGHT (POUNDS)
	AAC	ACSR	A	B	W	C	J	
ACCC-1313	#4 - 266 MCM	#4 - 4/0 MCM	3	3	2-1/2	2-1/2	1/2	1.55
ACCC-2020	4/0 - 500 MCM	4/0 - 397 MCM	3-1/2	3-1/2	2-1/2	2-1/2	1/2	1.10
ACCC-2424	350 - 650 MCM	336-550 MCM	4	4	2-3/4	2-3/4	1/2	3.60
ACCC-3434	550 - 1000 MCM	477 - 795 MCM	4	4	3	3	1/2	1.40
ACCC-3939	900 - 1300 MCM	715 - 1113 MCM	4-1/4	4-1/4	3-1/4	3-1/4	1/2	3.45
ACCC-4343	1250 - 1600 MCM	1113 - 1431 MCM	4-1/2	4-1/2	4-3/4	4-3/4	5/8	6.40
ACCC-4949	1500 - 2000 MCM	1500 - 2000 MCM	4-3/4	4-3/4	4	4	5/8	5.70
*ACCC-1139-1139	4/0 - 1300 MCM	4/0 - 1113 MCM	4-1/4	4-1/4	3-1/4	3-1/4	1/2	4.00