

# BRONZE BUS SUPPORTS


## TYPE CXTI

Expansion  
Pipe to Insulator

Bronze alloy expansion bus support for copper pipe.  
Hardware supplied for CAP mounting. For PIN mounting add suffix  
(P) to catalog number.

Example: CXTI-53-5P

Castings: Electrical Bronze  
Flexible Straps: Laminated Copper  
Clamping Hardware: Silicon Bronze  
Mounting Hardware: Galvanized Steel

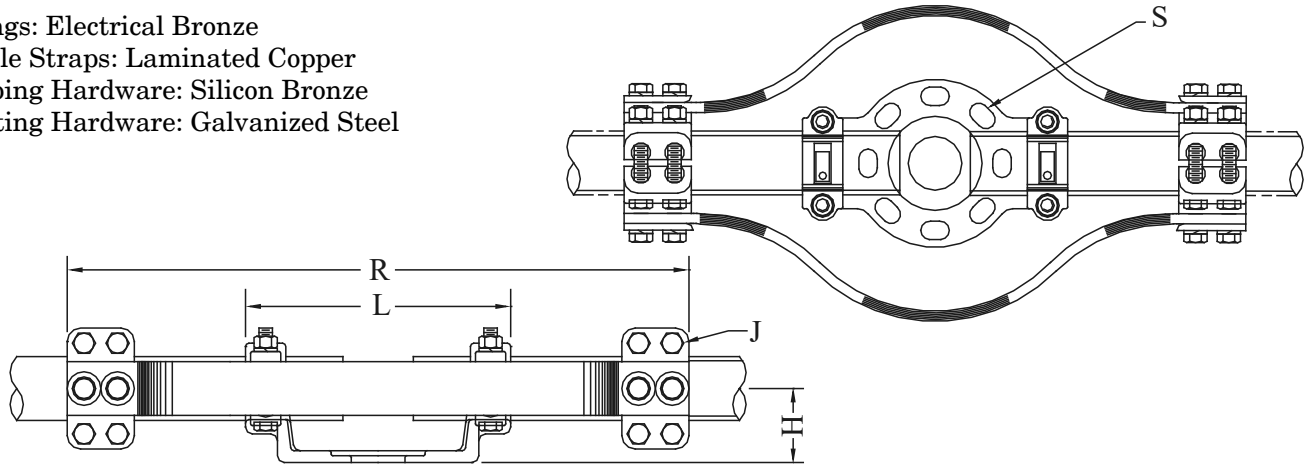

CATALOG NUMBER	PIPE SIZE (NPS)	B.C.	DIMENSIONS-INCHES					WEIGHT (POUNDS)
			H	L	R	J	S	
CXTI-21-3	1/2	3	1-11/16	2-1/4	15	3/8	9/16 x 13/16	12.70
CXTI-21-5		5	1-3/4	2-1/4	15-1/2	3/8	11/16 x 1-1/16	13.75
CXTI-30-3	3/4	3	2	4-1/4	13-1/2	3/8	9/16 x 13/16	13.45
CXTI-30-5		5	2	4-1/2	15-1/2	3/8	11/16 x 1-1/16	14.90
CXTI-39-3	1	3	2	5-3/4	13-3/4	3/8	9/16 x 13/16	14.75
CXTI-39-5		5	2	5-3/4	15-5/8	1/2	11/16 x 1-1/16	17.15
CXTI-49-3	1-1/4	3	2-1/4	4-3/4	14	1/2	9/16 x 13/16	27.35
CXTI-49-5		5	2-1/4	4-3/4	14-5/8	1/2	11/16 x 1-1/16	30.20
CXTI-53-3	1-1/2	3	2-1/2	4-3/4	15	1/2	9/16 x 13/16	24.30
CXTI-53-5		5	2-1/2	5-3/4	15-5/8	1/2	11/16 x 1-1/16	29.65
CXTI-58-3	2	3	2-3/4	7-5/8	18-1/8	1/2	9/16 x 13/16	36.75
CXTI-58-5		5	2-3/4	9-7/8	23	1/2	11/16 x 1-1/16	38.90
CXTI-60-3	2-1/2	3	3-1/8	7-1/2	20-1/2	1/2	9/16 x 13/16	47.85
CXTI-60-5		5	3-1/8	9-5/8	22-5/8	1/2	11/16 x 15/16	49.75
CXTI-62-3	3	3	3-5/8	8-1/2	21-3/4	5/8	9/16 x 13/16	63.80
CXTI-62-5		5	3-5/8	9-3/4	21-3/4	5/8	11/16 x 15/16	65.60
CXTI-63-3	3-1/2	3	4	7-3/4	19-1/2	5/8	9/16 x 1-3/16	74.65
CXTI-63-5		5	4	9-1/4	19-1/2	5/8	11/16 x 1	78.40
CXTI-64-3	4	3	4-1/2	7-1/4	25-1/4	5/8	9/16 x 13/16	82.60
CXTI-64-5		5	4-1/2	9-1/4	25-1/4	5/8	11/16 x 1	84.10

# SEFCOR