


BRONZE TERMINALS

TYPE FNTT

Straight Bolted
Pipe to Flat

Castings: Electrical Bronze
Hardware: Silicon Bronze
Options: See Page 193

Bronze alloy terminal with hex head clamping bolts for connecting copper pipe to flat. Side formed pad. Clamping bolts have hex-stops for one-wrench installation. Suitable for normal and heavy duty applications. Flat pads have NEMA drilling.

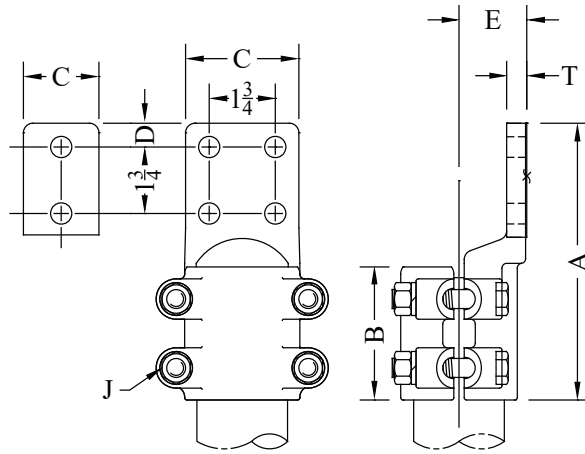

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES							WEIGHT (POUNDS)
			A	B	C	D	E	J	T	
FNTT-21-2B	1	1/2	5-1/4	2	2	5/8	1-1/16	3/8	5/16	1.85
FNTT-21-4A	2		5-1/4	2	3	5/8	3/4	3/8	1/4	2.00
FNTT-30-2B	1	3/4	5-3/8	2	2	5/8	7/8	3/8	5/16	2.10
FNTT-30-4A	2		5-5/16	2	3	5/8	7/8	3/8	5/16	2.60
FNTT-39-2B	1	1	5-1/4	2	2	5/8	1-1/4	3/8	3/8	2.70
FNTT-39-4A	2		5-1/4	2	3	5/8	1-1/16	3/8	5/16	2.95
FNTT-39-4B	2		6-7/8	2-1/2	4	1-1/8	1-1/16	3/8	5/16	3.40
FNTT-49-2B	1	1-1/4	6-3/8	2-3/4	2	5/8	1-1/4	1/2	7/16	4.25
FNTT-49-4A	2		6	2-3/4	3	5/8	1-1/4	1/2	3/8	4.50
FNTT-49-4B	2		7-5/8	3	4	1-1/8	1-1/2	1/2	3/8	5.80
FNTT-53-2B	1	1-1/2	6-1/16	2-3/4	2	5/8	1-1/2	1/2	1/2	5.15
FNTT-53-4A	2		6-3/4	3	3	5/8	1-1/2	1/2	3/8	6.95
FNTT-53-4B	2		7-1/4	3	4	1-1/8	1-5/8	1/2	3/8	5.85
FNTT-58-2B	1	2	7-3/8	3-1/2	2	5/8	1-3/4	1/2	1/2	8.35
FNTT-58-4A	2		7-1/4	3-1/2	3	5/8	1-3/4	1/2	1/2	7.05
FNTT-58-4B	2		8-1/4	3-1/2	4	1-1/8	1-7/8	1/2	1/2	8.70
FNTT-60-2B	1	2-1/2	7	3-1/2	2	5/8	2	1/2	9/16	7.85
FNTT-60-4A	2		7	3-1/2	3	5/8	2	1/2	9/16	7.85
FNTT-60-4B	2		7-1/8	3	4	1-1/8	2	1/2	5/8	9.55
FNTT-62-2B	1	3	7-9/16	3-11/16	2	5/8	2-1/2	5/8	5/8	10.00
FNTT-62-4A	2		7-9/16	3-11/16	3	5/8	2-1/2	5/8	5/8	10.00
FNTT-62-4B	2		8-1/16	3-1/4	4	1-1/8	2-1/2	5/8	5/8	14.00
FNTT-63-4A	2	3-1/2	8-3/8	4-1/2	3	5/8	2-3/4	5/8	3/4	17.50
FNTT-63-4B	2		9-1/8	4-1/2	4	1-1/8	2-3/4	5/8	3/4	17.50
FNTT-64-4A	2	4	6-3/4	3-1/4	3	5/8	3	5/8	1/2	17.90
FNTT-64-4B	2		7-7/16	3-1/4	4	1-1/8	3	5/8	9/16	13.65