BRONZE TERMINALS



Straight Bolted


Two Cables to Flat

Bronze alloy terminal with hex head clamping bolts for connecting two copper cables to flat.

Clamping bolts have hex-stops for one-wrench installation.

Flat pads have NEMA drilling. All sizes furnished with reversible cable caps. Angle connectors may be obtained by specifying desired angle. Example: FNCT290-20-2B

Castings: Electrical Bronze Hardware: Silicon Bronze Options: See Page 193

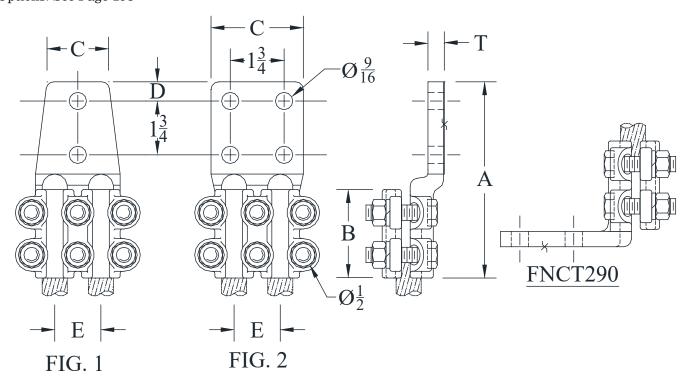

CATALOG	FIG. NO.	CONDUCTOR RANGE	DIMENSIONS - INCHES						WEIGHT
NUMBER			Α	B	С	D	E	Т	(POUNDS)
FNCT2-12-2B	1	#6 STR - 250 MCM	6-1/4	2-3/4	2	5/8	2-1/8	3/8	3.35
FNCT2-12-4A	2		6	2-3/4	3	5/8	2-1/8	3/8	3.50
FNCT2-20-2B	1	1/0 SOL - 500 MCM	6-3/8	2-7/8	2	5/8	1-1/2	1/2	4.75
FNCT2-20-4A	2		6-3/8	2-7/8	3	5/8	1-1/2	1/2	5.40
FNCT2-20-4B	2		7-1/2	2-7/8	4	1-1/8	1-1/2	1/2	6.15
FNCT2-34-4A	2	4/0 STR - 1000 MCM	7	3-1/2	3	5/8	1-3/4	1/2	7.25
FNCT2-34-4B	2		7-3/4	3-1/2	4	1-1/8	1-13/16	1/2	7.85
FNCT2-48-4B	2	1000 - 2000 MCM	9	4-3/8	4	1-1/8	2-5/8	11/16	17.85

