

ALUMINUM TERMINALS

TYPE AFXTO

Expansion Terminal
Pipe to Flat

Aluminum bolted expansion terminal with hex head clamping bolts for aluminum pipe to flat pad. Side formed tongues. Guides are sized for use with standard Schedule 40 pipe. Clamping bolts have hex stops for one-wrench installation. Flat pads have NEMA drilling. Contact sealant is recommended.

Add suffix (H) to catalog number for Schedule 80 pipe.


Example: AFXTO-58H-4A

Castings: 356-T6 Aluminum

Laminated Straps: 1100-0 Aluminum

Hardware: Aluminum Alloy

Options: See Page 211

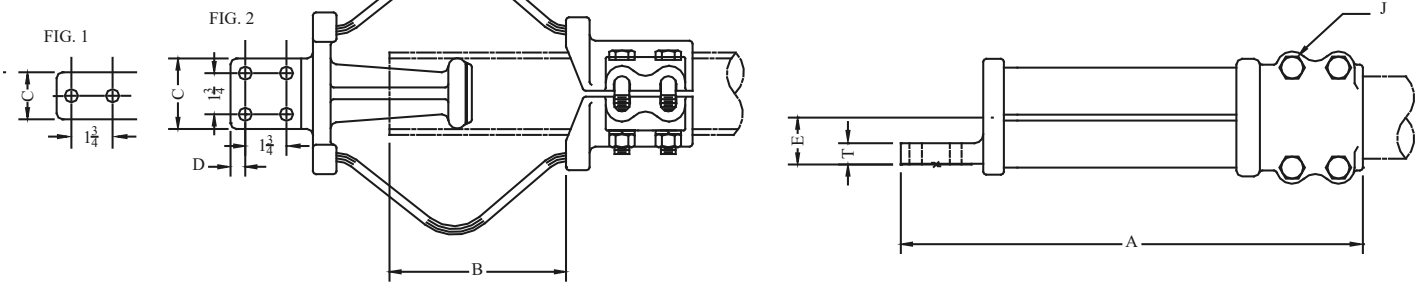

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS - INCHES							WEIGHT (POUNDS)
			A	B	C	D	E	J	T	
AFXTO-39-2B	1	1	14	4-1/16	2	5/8	1-3/8	1/2	3/8	3.90
AFXTO-39-4A	2		14	4-1/16	3	5/8	1-3/8	1/2	3/8	4.05
AFXTO-39-4B	2		15	4-1/16	4	1-1/8	1-3/8	1/2	3/8	5.00
AFXTO-49-2B	1	1-1/4	15-1/4	5-1/8	2	5/8	1-1/2	1/2	1/2	6.60
AFXTO-49-4A	2		15-1/4	5-1/8	3	5/8	1-1/2	1/2	1/2	6.90
AFXTO-49-4B	2		16-1/4	5	4	1-1/8	1-1/2	1/2	1/2	7.10
AFXTO-53-2B	1	1-1/2	15-3/4	5-1/8	2	5/8	1-1/2	1/2	5/8	4.80
AFXTO-53-4A	2		15-1/8	5-1/8	3	5/8	1-1/2	1/2	5/8	4.85
AFXTO-53-4B	2		16-1/2	5-1/8	4	1-1/8	1-1/2	1/2	1/2	6.35
AFXTO-58-2B	1	2	15-7/8	5	2	5/8	1-3/4	1/2	1/2	6.75
AFXTO-58-4A	2		15-7/8	5	3	5/8	1-3/4	1/2	1/2	7.00
AFXTO-58-4B	2		17-1/4	5	4	1-1/8	1-3/4	1/2	1/2	7.00
AFXTO-60-2B	1	2-1/2	18-1/2	7	2	5/8	2	1/2	11/16	11.75
AFXTO-60-4A	2		18-1/2	7	3	5/8	2	1/2	11/16	11.75
AFXTO-60-4B	2		19-1/2	7	4	1-1/8	2	1/2	3/4	12.50
AFXTO-62-2B	1	3	19-5/8	7-1/2	2	5/8	2	5/8	7/8	14.85
AFXTO-62-4A	2		19-5/8	7-1/2	3	5/8	2	5/8	7/8	14.85
AFXTO-62-4B	2		20-1/8	7-1/2	4	1-1/8	2-1/2	5/8	7/8	15.85
AFXTO-63-4A	2	3-1/2	20-1/4	7-3/4	3	5/8	2-5/8	5/8	7/8	19.40
AFXTO-63-4B	2		21-1/4	7-3/4	4	1-1/8	2-5/8	5/8	11/16	19.40
AFXTO-64-4A	2	4	20-1/2	8-1/4	3	5/8	2-7/8	5/8	7/8	20.00
AFXTO-64-4B	2		21-1/4	8-1/4	4	1-1/8	2-7/8	5/8	1	20.70
AFXTO-67-4A*	2	5	23-1/8	7	3	5/8	3-5/8	5/8	1	38.70
AFXTO-67-4B*	2		24-1/8	7	4	1-1/8	3-5/8	5/8	1	38.70
AFXTO-69-4A*	2	6	23-1/2	6-1/2	4	5/8	4	5/8	1	47.10
AFXTO-69-4B*	2		24-1/2	6-1/2	4	1-1/8	4	5/8	1	47.10

*Six Conductor-Clamping Bolts

SEFCOR