

# ALUMINUM TERMINALS

## TYPE WSFFT

Weldment Expansion  
Pipe to Flat

Aluminum semi-flexible terminal for connecting aluminum pipe to flat. Aluminum pad surface is coated with contact sealant and factory-bolted to laminated strap. Flat pad on laminated strap has NEMA drilling. Contact sealant is recommended.


NOTE: This connector is not recommended as a support member.

Castings: 356-T6 Aluminum

Laminated Straps: Copper (Contact Pads Tin Plated)

Strap Mounting Hardware: Stainless Steel

Options: See Page 211

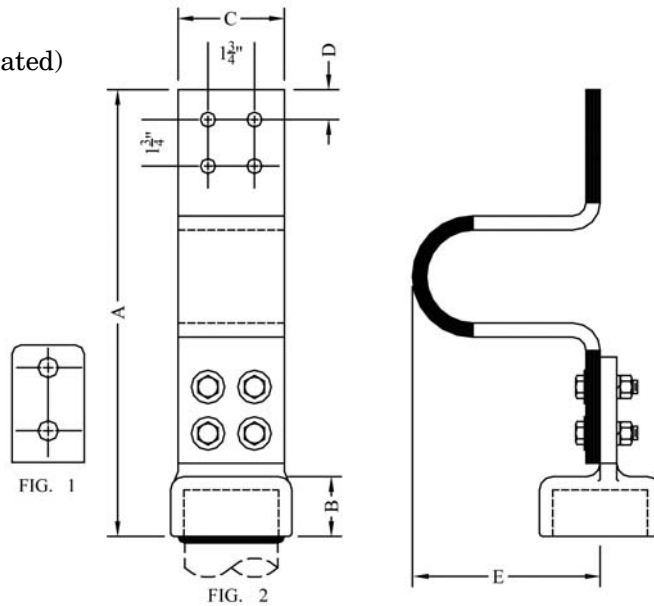

CATALOG NUMBER	FIG. NO.	PIPE SIZE (NPS)	DIMENSIONS-INCHES					WEIGHT (POUNDS)
			A	B	C	D	E	
WSFFT-30-2B	1	3/4	12-5/8	15/16	2	5/8	6	5.60
WSFFT-30-4A	2		12-5/8	15/16	3	5/8	6	5.80
WSFFT-39-2B	1	1	12-3/4	15/16	2	5/8	6-1/2	6.20
WSFFT-39-4A	2		12-3/4	15/16	3	5/8	6-1/2	6.75
WSFFT-49-2B	1	1-1/4	13-1/2	1	2	5/8	6-3/8	7.50
WSFFT-49-4A	2		13-1/2	1	3	5/8	6-3/8	8.25
WSFFT-53-2B	1	1-1/2	13-3/4	1-3/8	2	5/8	6-3/8	8.85
WSFFT-53-4A	2		13-3/4	1-3/8	3	5/8	6-3/8	8.85
WSFFT-53-4B	2		14-7/8	1-3/8	4	1-1/8	6-3/8	9.50
WSFFT-58-2B	1	2	13-5/8	1-1/2	2	5/8	7	11.50
WSFFT-58-4A	2		13-5/8	1-1/2	3	5/8	7	11.70
WSFFT-58-4B	2		14-7/8	1-1/2	4	1-1/8	7	12.50
WSFFT-60-2B	1	2-1/2	14-1/4	1-1/2	2	5/8	7	12.65
WSFFT-60-4A	2		14-1/4	1-1/2	3	5/8	7	12.75
WSFFT-60-4B	2		14-7/8	1-1/2	4	1-1/8	7	13.60
WSFFT-62-2B	1	3	14-1/2	1-3/4	2	5/8	7	14.00
WSFFT-62-4A	2		14-1/2	1-3/4	3	5/8	7	14.00
WSFFT-62-4B	2		15-1/4	1-3/4	4	1-1/8	7	14.50
WSFFT-63-4A	2	3-1/2	15-3/8	1-7/8	3	5/8	7	16.40
WSFFT-63-4B	2		16-1/4	1-7/8	4	1-1/8	7	17.60
WSFFT-64-4A	2	4	15-1/8	2	3	5/8	7	19.00
WSFFT-64-4B	2		16	2	4	1-1/8	7	19.75
WSFFT-67-4B	2	5	17-1/2	2-7/8	4	1-1/8	8	20.00